



## Z25 Security Electric Fence Energiser

PTE1047

### OVERVIEW:

The JVA Z25 is a two zone security electric fence energiser purpose built for control and monitoring of perimeter security electric fences. It can meet all of the requirements from basic residential to fully integrated high profile installations. The Z25 can be programmed and controlled using the optional LCD keypad or Touch keypad. It can also be networked with other Z Range energisers to form a pulse synchronized group for larger sites which require multiple zones.

The Z25 allows you to control and supervise an electric fence from:

- On Site using the optional LCD keypad or Touch keypad
- A control room using Perimeter Patrol<sup>[1]</sup> PC Software
- Anywhere in the world using the Internet<sup>[2]</sup>

[1] PTE0248 Wi-Fi GPIO required

[2] PTE0320 GSM Gateway or PAE253 Wi-Fi Gateway required

### FEATURES:

- Safe but effective deterrent, high voltage output
- High and low power modes
- Built in charger and space for a 12V 7.2aH backup battery
- Alarms on fence short or open circuit
- Control and programming via LCD keypad or Touch keypad
- Large number of programmable options
- Monitor via PC (using Perimeter Patrol software)
- 3 control inputs
- 3 switched 12V DC outputs (Siren, Strobe 1 and Strobe 2)



### SPECIFICATIONS:

Output	Fence Voltage:	9 kV
	Energy:	2 x 2.5 Joules
Size	Height:	303 mm
	Width:	223 mm
	Depth:	122 mm
Weight	Product:	1.9 kg (No Battery)
	Product:	4.0 kg (Battery)
	Packed:	2.2 kg (No Battery)

### WARRANTY:



3 Year Manufacturer Warranty (excluding lightning damage)

### FOR MORE INFORMATION:

See the Website at: <http://www.jva-fence.com.au>



**VOLTAGE AND ENERGY OUTPUT GRAPHS:**

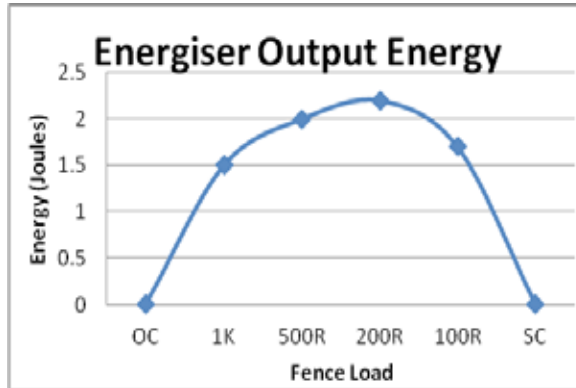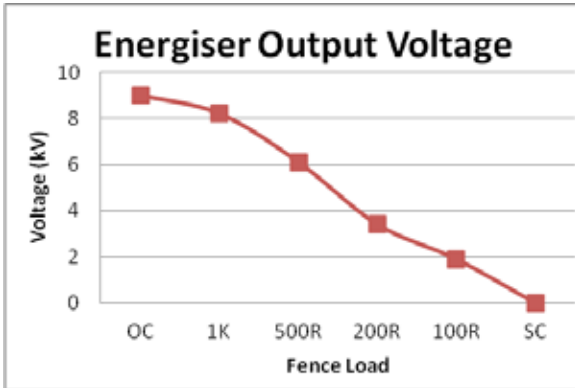

**Z SERIES MODELS:**

Model	Z11	Z13	Z14	Z14R	Z18	Z25	Z28
Zones	1	1	1	1	1	2	2
Joules	1.5	3	5	4	8	2x2.2	2x4
LCD Display	No	No	Yes	Yes	Yes	Yes	Yes
<b>Solar Power</b>							
Panel	50W	75W	75W	75W	100W	75W	100W
Battery	30ah	50ah	50ah	50ah	105ah	50ah	105ah

**Dimensions:**

